


Revisions		Approved	Date
Description/Approved/Date	M.H.	7/7/99	
	Checked	M.H.	7/7/99
	Drawn	K.R.E.	Date 7/6/99

NOTES (plating thickness in micro-inches):	
1. Per QQ-B-626	6. Per ZZ-R-765
2. Per QQ-S-764	7. Per WW-T-799
3. Per QQ-C-530	8. Gold pl. 50 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750	9. Nickel pl. 100 min. over copper strike
	10. Per QQ-P-35
	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike

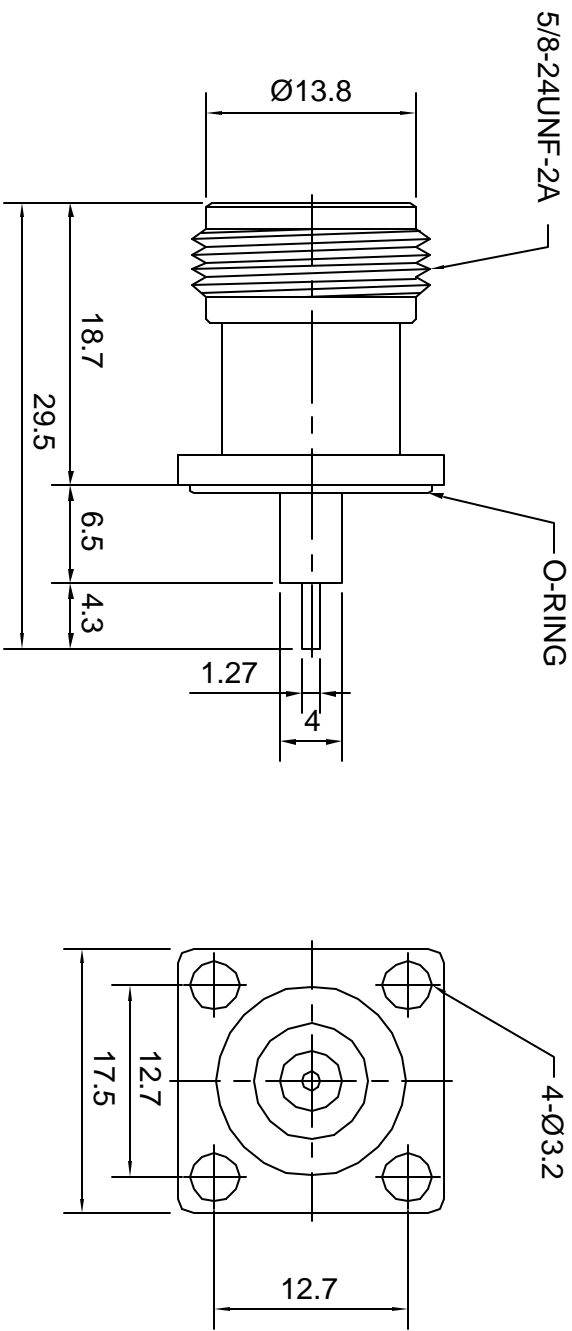

ITEM	MATERIAL	FINISH	Tolerances
Connector Body	Brass, Note 1	Nickel, Note 9	1-20=+/-0.2
Center Contact: Female	Phosphor Bronze	Gold, Note 11	20-30=+/-0.3
Insulation	Teflon, Note 5	None	30-40=+/-0.4
Ferrule	--	--	40-50=+/-0.5
Gasket	Silicone Rubber, Note 6	None	50-100=+/-0.75
Hex Nut	--	--	100-300=+/-1.5
Lock Washer	--	--	Angles=+/-1

Dimensions are in Millimeters	
Part Number: LTI-NSF920DNT	
Description: N Panel Mount Jack, Ext. Dial., Solder Post, O-ring	
Scale: 2:1	Drawing No. MNSF920D
File: NSF920D	

Lighthouse Technologies, Inc.	
4907 Morena Boulevard, #1411	
San Diego, CA 92117	