

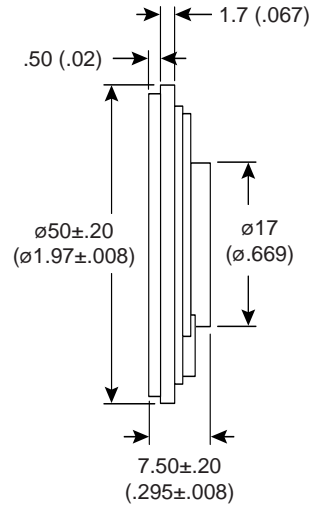


Part Number:

253-5502



Frequency Response

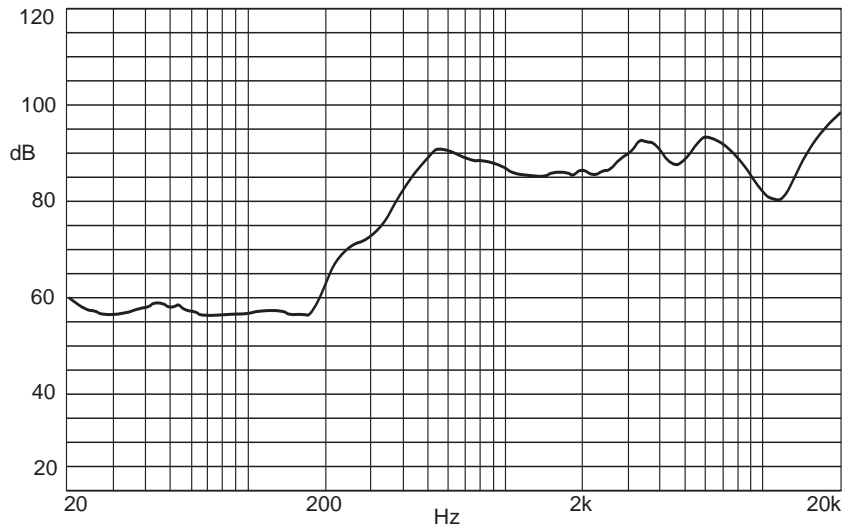

Speaker

KT-400228

Electrical Specifications:

- Impedance: $8\Omega \pm 15\%$ @ 1KHz
- Rated Power: 0.8W
- Maximum Power: 1.0W
- Resonant Frequency: $500\text{Hz} \pm 20\%$ Hz
- Frequency Range: 350 ~ 20KHz
- Harmonic Distortion: > 5% @ 1KHz

Materials:

- Metal Housing: SPCC
- Terminal: Epoxy
- Cloth: .50mm
- Diaphragm: Polyester (50AH-75B)
- Voice Coil: CU.; Inner Diameter - 13.4mm
- Washer: SPCC
- Magnet: NdFeb 12.5 x 1.5mm
- Gasket: Paper

Mechanical Specifications:

- Operating Temperature: -25°C to 50°C